

FLAT PANEL 1X4



Suitable Locations

- Offices
- Warehouse
- Garage
- Shopping Mall
- School
- Other commercial applications

Advantage

- cETLus, DLC Premium
- CRI more than 80
- 0-10V dimmable driver
- Input voltage is AC100-277 V
- Reduces energy consumption up to 60%
- 5 years warranty
- Surface mounting installation
- Photocell sensor option
- Special indoor luminaire design

Product description

- 5 years warranty from the shipping date;
- Will replace all the failed products due to design/production quality during warranty period;
- Will bear all cost of maintains if the customer can help us to repair locally;
- Don't have the responsibility to compensate for any incorrect installation or artificial damage;
- Don't have the responsibility to compensate for damage occurred during the transit.


Product Number	Size	Power (W)	Dimensions	Color Temperature (K)	System Luminous Flux (lm)	System Efficacy (Lm/W)
36W-40K	1 x 4ft	36	47.42" x11.93" x0.47"	4000K	4,680	130
36W-50K	1 x 4ft	36	47.42" x11.93" x0.47"	5000K	4,680	130

Photometric Data

Rated Power	36W
Input Voltage	100-277VAC
Frequency	50 / 60 Hz
Power Factor	>0.9
Beam Angle	120°
CRI	≥ 80
Dimming Function	0 - 10 V
Operating Temperature	-30°C to 45°C
Power Efficiency	>0.88

Dimension

front view

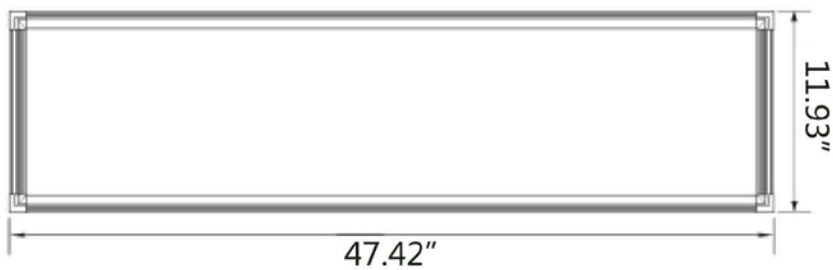

side view

